

FIG. 1


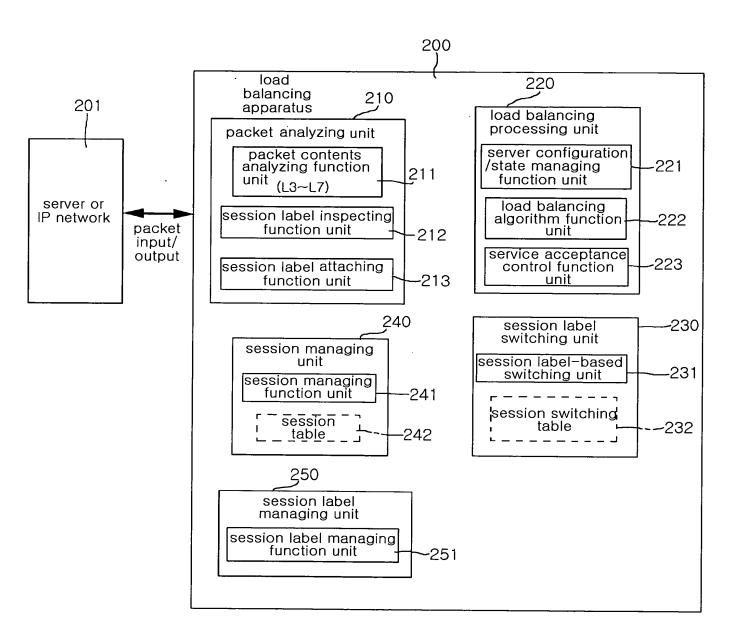


FIG. 2

31	32	33	34	35	36)		37	38
session	protocol	source IP address	destination IP address	source port number	destination port number	session label		server
identifier						C2S	S2C]
1 1	TCP	126.254.1.100	176.100.10.1	2001	80	401	402	server 1
2	UDP	126.254.1.100	176.100.10.1	2002	80	403	404	server 2
						2n-1	2n	server x

FIG. 3

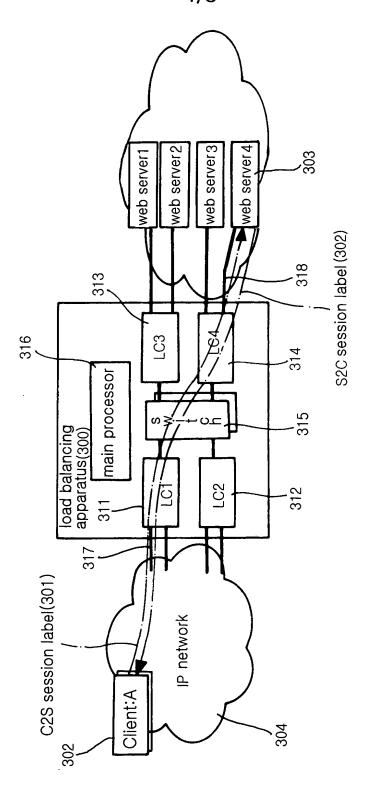

51		52 (53		
occion	input	port	output port (
session label	line card	port	line card	port	
••••				_	
1001	LC1	1	LC4	2	
1002	LC4	2	LC1	1	

FIG. 5

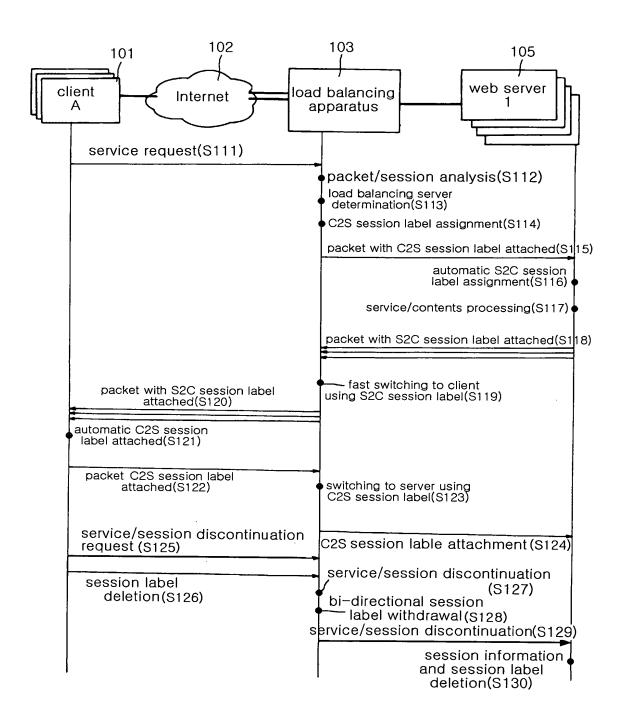


FIG. 6

session	session label		destination	client	state	
number	C2S S2C		server	Onone		
1	1	2	server 1	129.254.127.3	in service	
2	3	4	server 2	131.222.108.8	in service	
••••	2n-1	2n	server x	••••		

FIG. 7

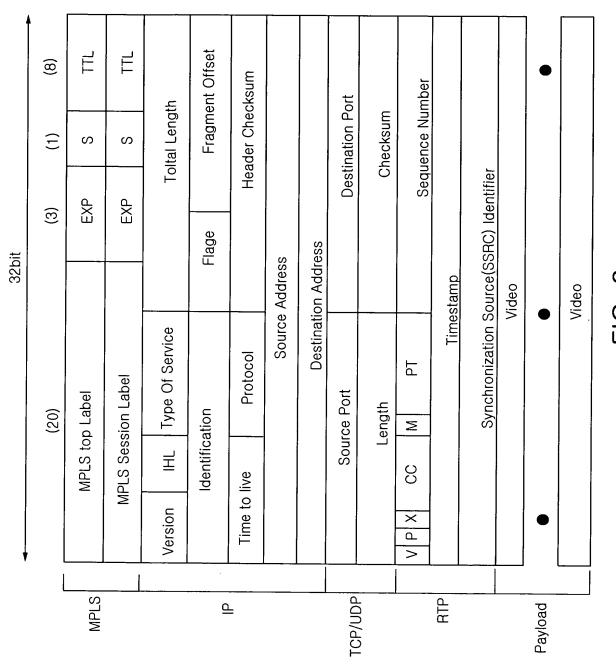


FIG. 8